




6R741F0614PVFK

(6R), (), 5-way,

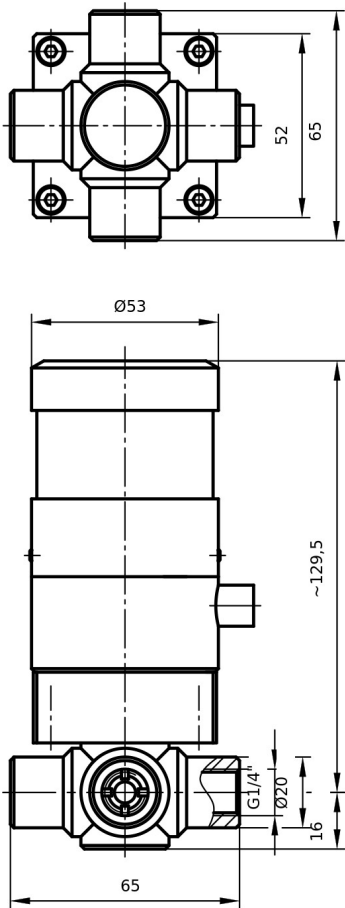

(mm);

	DN06
	G1/4"
	PVDF
O-	FFKM
	PVDF
	PTFE
	-
Kvs	0.9 m³/h
	140°C
	PN10
	70°C
	24 VDC
	180 mA
	1.2 Nm
EN 60529	IP 65
	8-pole round plug with 2 m connection cable

(20°C) , 가 가 .