




6R750F0414PFFK

(6R), (), 5way, L-

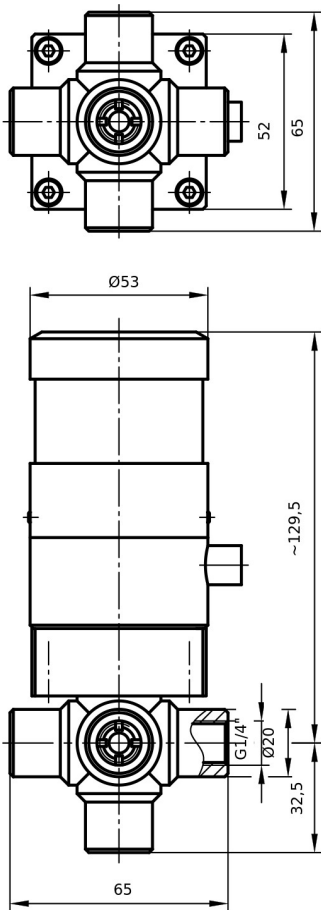

(mm);

	DN04
	G1/4"
	PFA
O-	FFKM
	PTFE
	PTFE
	-
Kvs	0.58 m³/h
	180°C
	PN10
	70°C
	24 VDC
	180 mA
	1.2 Nm
EN 60529	IP 65
	8-pole round plug with 2 m connection cable

(20°C) , 가 가 .